

Satisfy Professional's Needs



Cordless Breaker HM004G



28.6mm Hex
Shank Type

40V^{Li-ion} max + 40V^{Li-ion} max



XGT X2
80V^{max}

High power similar to corded models

Impact energy

72.8 Joule

Low Vibration

6.5 m/s²

BL MOTOR AVT AWS SOFT NO LOAD XPT

XGT X2
80Vmax



40V Li-Ion max + 40V Li-Ion max

Powered by two 40Vmax XGT
Li-Ion batteries in series
(80Vmax)

BL
MOTOR

High power
brushless
motor

Impact energy
72.8 Joule



AWS

(Auto-start Wireless System)

Connects to compatible vacuum cleaner with Bluetooth.
The vacuum cleaner automatically runs while the switch is on.

Bluetooth



Accessories

Dust extractor attachment set

w/o hose
Part No. 197168-2
** 197170-5

w/ hose
Part No. 197148-8
** 197172-1

**With Sensomatic chip



Low Vibration thanks to **AVT**


(Anti-Vibration Technology)

Vibration level **6.5 m/s²**

Active dynamic vibration absorber moves in the opposite direction to the drive piston to reduce vibration.

Vibration absorbing housing

provides a practical combination of high power and low vibration.



Vibration absorbing spring (4 places)


Counter weight mechanism

reduces vibration during chipping operation.



SOFT NO LOAD

Suppression of motor speed during no-load

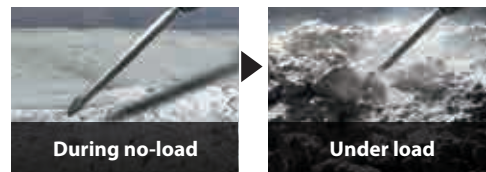

During no-load

Under load

Main power switch

Battery capacity warning lamp



Maintenance warning lamp

LED job light

Twin LEDs with preglow and afterglow functions



Slim body for excellent visibility

219mm



Hex shank: 28.6mm

Self sharpening bull point
(Country-specific)

XPT

(eXtreme Protection Technology)



Charging Time

	Fast Charging			
	DC40RA	DC40RB	DC40RC	DC40WA
BL4020 2.0Ah	22 min	30 min	110 min	
BL4025 2.5Ah	28 min	38 min	130 min	
* BL4040/F 4.0Ah	45 min	67 min	210 min	
* BL4050F 5.0Ah	50 min	85 min	260 min	
* BL4080F 8.0Ah	76 min	170 min	420 min	

*1 Recommended battery

Cordless Breaker

HM004G 1-1/8" : 28.6mm Hex Shank

28.6mm Hex Shank	Impact energy 72.8 J (53.7 ft.lbs.)
Constant Speed	Blows per minute (BPM) 870
Soft Start	Shank diameter 28.6 mm (1-1/8")
Built-in Job Light	Sound power level 103 dB(A) (Uncertainty (K): 1.62 dB(A))
Anti-restart function	Sound pressure level 95 dB(A) (Uncertainty (K): 1.62 dB(A))
	Vibration level 6.5 m/s ² (Uncertainty (K): 1.5 m/s ²)
	Dimensions (L x W x H) 882 x 227 x 540 mm
	(34-3/4 x 8-15/16 x 21-1/4")
	Net weight 29.7 - 32.1 kg (65.5 - 70.8 lbs.)

Standard Equipment : Hex wrench, Bull point, Wireless unit set

The weight may differ depending on the attachment(s), including the battery cartridge.
The lightest and heaviest combination, according to EPTA-Procedure 01/2014, are shown in the table.
Items of standard equipment and specifications may vary by country or area.

Makita Corporation

3-11-8 Sumiyoshi-cho, Anjo, Aichi, 446-8502 Japan



PRINTED IN JAPAN 202404

www.makita.com