



Cordless Grass Trimmer UR013G / UR014G



XGT
40V **LI-ION**
max



UR013G



UR014G

Exclusively for use with nylon cutting head, with Reverse rotation mode



Max Output


1.5 kW (with BL4080F)





photo: UR013G

Multi functional control panel: near right hand position for easy access and operation

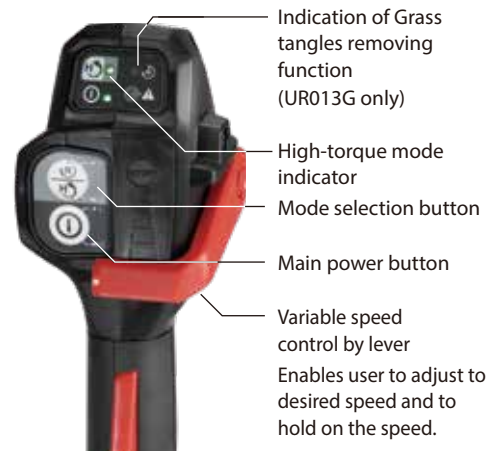

High output power



**BL
MOTOR**

Max Output
1.5 kW
(with BL4080F)

High-torque mode

- Applicable to heavy duty operation.
- Recommended for heavy-duty operation where particularly high torque is required, such as shredding operation.

Low noise

Model UR013G (w/ Plastic blade) **95 dB(A)**

Model UR014G (w/ Nylon cutting head) **93 dB(A)**

Guaranteed value according to European Outdoor Noise Directive 2000/14/EC (with the blade which generates the highest noise levels)

Run Time

Model UR013G **81-11 min**

Model UR014G **51-18 min**

Low speed - Max. speed

with Nylon cutting head and BL4050F on a single full battery charge / No load

IPX4-compatible




Enhanced Dust and Drip-proof Performance



AFT


Active Feedback sensing Technology

Torque limiter turns the motor off if the tool is suddenly forced to lock

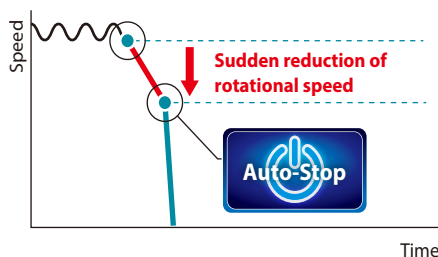


UR013G only

Tool-less handle angle adjustment

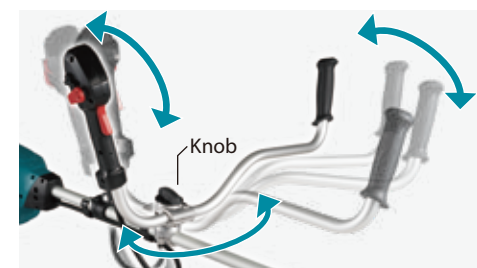

Left/right separate type bike handle

Power as 35cc engine tool

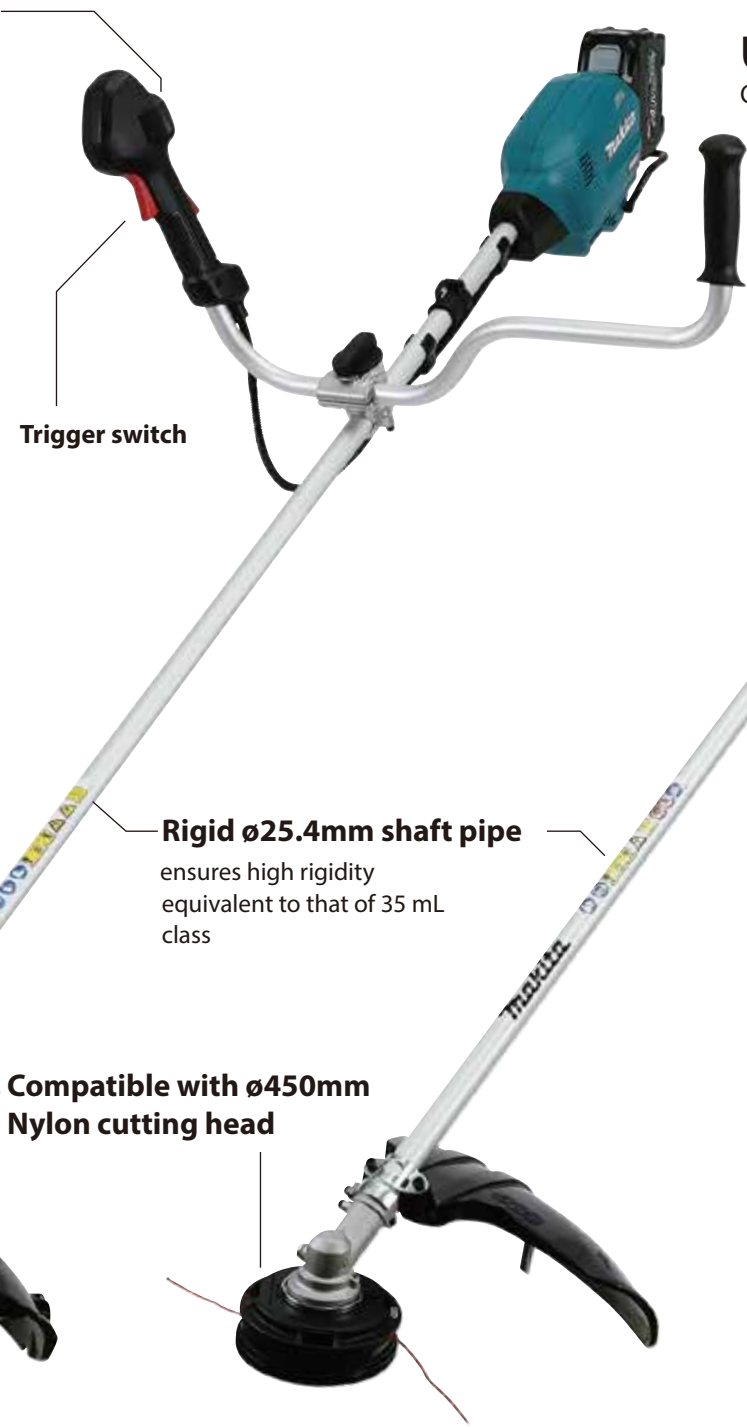

UR013G
Offset bike Handle



UR014G
Loop-Handle
Exclusively for use with nylon cutting head

Trigger switch

Trigger switch

Rigid ø25.4mm shaft pipe
ensures high rigidity equivalent to that of 35 mL class

Compatible with ø450mm Nylon cutting head

UR014G only
Reverse rotation mode



Indication of Reverse rotation function


- Counterclockwise blade rotation/ Clockwise blade rotation can be selected to suit the user's preferences or needs; for example, when he/she desires to control the scattering direction of grass clippings in such an operation as cutting a lawn beside driveway (with memory function).
- Press and hold the mode selection button for Counterclockwise blade rotation/ Clockwise blade rotation (with memory function).

Counterclockwise blade rotation



By trimming Counterclockwise

Clockwise blade rotation



By trimming Clockwise

Shredder blade/ Chisel blade can be used.



270mm Shredder blade



225mm Chisel blade

Grass tangles removing function



Reverse rotation or Grass tangles removing function

Accessories

For UR013G

Chisel blade

Part No. 199872-9
Blade dia.: 225mm



Protector 225 set MG

Part No. 1911Y0-3



Shredder blade

Part No. 199874-5
Blade dia.: 270mm



Protector set MG

Part No. 1911Y1-1



Brushcutter blade

	2-tooth blade	3-tooth blade	4-tooth blade
Blade dia			
255mm	198345-9	195299-1	196895-8

Plastic blade

	Plastic blade Set	Replacement plastic blade
Cutting width		
305mm	199868-0	199870-3



Trimmer head

Part No. 199884-2
Cord/Line: 2.7mm
Ref.: 105-M10L



Part No. 1911Y2-9
Cord/Line: 2.7mm
Ref.: 121-M10L



For UR014G

Trimmer head

Part No. 1911Y3-7
Cord/Line: 2.7mm
Ref.: 121SP
Spline-engaged with the sleeve of Cutter shaft



Shoulder strap assembly

Comfort
Part No.122A37-4 Part No.199378-7




Shoulder strap assembly

Single
Part No.127759-5




UR013G, UR014G

Four-leaf Spiral Nylon cord

Red	Size	Part No.
	2.7mmx15m	E-01828
	2.7mmx30m	E-01834
	2.7mmx180m	E-01840








Charging Time

	Fast Charging	
	DC40RA	DC40RC
 BL4020 2.0Ah	22 min	30 min
BL4025 2.5Ah	28 min	38 min
BL4040 4.0Ah	45 min	67 min
*1BL4050F 5.0Ah	50 min	85 min
*1BL4080F 8.0Ah	76 min	170 min

*1 Recommended battery

Cordless Grass Trimmer

UR013G / UR014G

		UR013G	UR014G
 Variable Speed  Brake  Reversing (UR014G only)  Constant Speed  Soft Start	Cutting Width	Metal blade: 255 mm (10") Chisel blade: 225 mm (8-7/8") Nylon Cutting Head: 450 mm (17-3/4") Shredder blade: 270 mm (8-7/8") Plastic Blade: 305 mm (12")	- - 450 mm (17-3/4") - -
	No Load Speed (RPM)	Metal blade: 3,500-6,700 Nylon Cutting Head: 3,500-5,000	- 4,000 - 5,000
	Spindle size	M10 x 1.25 LH	M10 x 1.25 LH
	Dimensions (L x W x H)	1,863 x 690 x 546 mm Tool only (73-1/2 x 27-1/4 x 21-1/2") 1,966 x 690 x 546 mm w/ Nylon cutting head and BL4080F: (77-1/2 x 27-1/4 x 21-1/2")	1,857 x 330 x 304 mm (73 x 13 x 12") 1,958 x 330 x 304 mm (77 x 13 x 12")
	Net weight	5.9 - 7.2 kg (13.0 - 15.9 lbs.)	5.5 - 6.7 kg (12.1 - 14.8 lbs.)

Standard Equipment: Metal blade (UR013G only) / Nylon cutting head / Plastic blade (UR013G only), Tool cover (UR013G only), Accessory bag, Hex wrench, Box driver, Shoulder belt, Battery, Charger

The weight may differ depending on the attachment(s), including the battery cartridge. The lightest and heaviest combination, according to EPTA-Procedure 01/2014, are shown in the table. Items of standard equipment and specifications may vary by country or area.

Makita Corporation

3-11-8 Sumiyoshi-cho, Anjo, Aichi, 446-8502 Japan

PRINTED IN JAPAN 202302